

Spectrum Sensing using Distributed Sequential Detection via Noisy MAC

Jithin K. Sreedharan and Vinod Sharma, *Senior Member, IEEE*

Abstract

This paper considers cooperative spectrum sensing algorithms for Cognitive Radios which focus on reducing the number of samples to make a reliable detection. We develop an energy efficient detector with low detection delay using decentralized sequential hypothesis testing. Our algorithm at the Cognitive Radios employs an asynchronous transmission scheme which takes into account the noise at the fusion center. We start with a distributed algorithm, DualSPRT, in which Cognitive Radios sequentially collect the observations, make local decisions and send them to the fusion center. The fusion center sequentially processes these received local decisions corrupted by Gaussian noise to arrive at a final decision. Asymptotically, this algorithm is shown to achieve the performance of the optimal centralized test, which does not consider fusion center noise. We also theoretically analyse its probability of error and average detection delay. Even though DualSPRT performs asymptotically well, a modification at the fusion node provides more control over the design of the algorithm parameters which then performs better at the usual operating probabilities of error in Cognitive Radio systems. We also analyse the modified algorithm theoretically. Later we modify these algorithms to handle uncertainties in SNR and fading.

Index Terms

Cooperative spectrum sensing, distributed detection, sequential detection.

I. INTRODUCTION

Presently there is a scarcity of spectrum due to the proliferation of wireless services. Cognitive Radios (CRs) are proposed as a solution to this problem. They access the spectrum licensed

Authors are with Department of Electrical Communication Engineering, Indian Institute of Science, Bangalore 560012, India (Email:{jithin,vinod}@ece.iisc.ernet.in)

Preliminary versions of this paper have been presented in NCC 2011, WCNC 2011 and Allerton 2011.

to existing communication services (Primary Users) opportunistically and dynamically without causing much interference to the Primary Users. This is made possible via spectrum sensing by the Cognitive Radios (Secondary Users), to gain knowledge about the spectrum usage by the primary devices. However due to the strict spectrum sensing requirements ([1], [25]) and the various inherent wireless channel impairments spectrum sensing has become one of the main challenges faced by the Cognitive Radios.

Multipath fading, shadowing and hidden node problem cause serious problems in spectrum sensing. Cooperative (decentralized or distributed) spectrum sensing in which different cognitive radios interact with each other exploiting spatial diversity, ([1], [22]) is proposed as an answer to these problems. Also it improves the probability of false alarm and the probability of miss-detection. Cooperative spectrum sensing can be either centralized or distributed [25]. In the centralized algorithm a central unit gathers sensing data from the Cognitive Radios and identifies the spectrum usage ([16], [25]). On the other hand, in the distributed case each Secondary User collects observations, makes a local decision and sends to a fusion node to make the final decision. Centralized algorithms provide better performance but also have more communication overhead in transmitting all the data to the fusion node. In the distributed case, the information that is exchanged between the Secondary Users and the fusion node can be a soft decision (summary statistic) or a hard decision ([16]). Soft decisions can give better gains at the fusion center but also consume higher bandwidth at the control channels (used for sharing information among Secondary Users). However hard decisions provide as good a performance as soft decisions when the number of cooperative users increases ([5]).

Spectrum sensing problem can be formulated in different ways, two of them being Neyman-Pearson framework (fixed sample size detection, e.g. matched filter, energy detector etc.) and sequential detection framework, reducing the number of samples taken for deciding if a primary is transmitting or not. It is reasonable to consider the sequential framework for spectrum sensing as it enables the detector to decide upon the decision more quickly than the fixed sample size counterpart. More precisely there are two types of sequential detection: one can consider detecting when a primary turns ON (or OFF) (change detection, see [2], [11] and the references therein) or just testing the hypothesis whether the primary is ON or OFF ([6], [20], [24] and references therein). In sequential hypothesis testing one considers the case where the status of the primary channel is known to change very slowly, e.g., detecting occupancy of a TV transmission. Usage

of idle TV bands by the Cognitive network is being targeted as the first application for cognitive radio. This framework also finds application in quickest detection of unoccupied spectrum in slotted Primary User transmission systems (e.g., cellular systems). In this setup (minimising the expected sensing time with constraints on probability of errors) Walds' SPRT (Sequential Probability Ratio Test) provides the optimal performance for a single Cognitive Radio ([21]). But the optimal solutions for cooperative setup are not available.

We consider sequential hypothesis testing in cooperative setup. Feedback from the fusion node to the CRs can possibly improve the performance. However that also requires an extra signalling channel which may not be available and also has its own cost. Thus in our framework we assume that there is no feedback from the fusion center to CRs. In sequential decentralized detection framework, optimization needs to be performed jointly over sensors and fusion center policies as well as over time. Unfortunately, this problem is intractable for most of the sensor configurations ([13], [23]). Specifically there is no optimal solution available for sensor configurations with no feedback from fusion center and limited local memory, which is more relevant in practical situations. Recently [7] and [13] proposed asymptotically optimal (order 1 and order 2 respectively) decentralized sequential hypothesis tests for such systems with full local memory. But these models do not consider noise at the fusion center and assume a perfect communication channel between the CR nodes and the fusion center. Also, often asymptotically optimal tests do not perform well at finite number of observations. [24] takes into account noisy channels between local nodes and fusion center in decentralized sequential detection framework. But optimality of the tests are not discussed and the paper is more focussed in finding the best signalling schemes at the local nodes with the assumption of parallel channels between local nodes and the fusion center. Also fusion center tests are based on the assumption of perfect knowledge of local node probability of false alarm and probability of miss-detection. However our test is shown to be asymptotically optimal, we assume MAC channel at the fusion center and the test is not based on the local node probability of error. Furthermore uncertainty in the received Signal to Noise Ratio (SNR) at the CRs and fading channels between primary and CR requires a composite hypothesis testing extension to the decentralized sequential detection problem and is not considered in these references.

In this paper, we propose DualSPRT. Unlike the previous works on cooperative spectrum sensing using sequential testing ([24], [20] and references therein) we analyse this algorithm the-

oretically also. Asymptotic properties of DualSPRT are studied and it is found that as thresholds increase, performance of the algorithm approaches the optimal centralized sequential solution, which does not consider fusion center noise. In addition, we generalize this algorithm to include channel gain uncertainty. Furthermore, we consider the receiver noise at the fusion node and use physical layer fusion to reduce the transmission time of the decisions by the local nodes to the fusion node. Later we improve over DualSPRT with more emphasis over the ease of design of parameters. Furthermore we introduce a new way of quantizing SPRT decisions of local nodes and extend this algorithm to cover SNR uncertainties and fading channels. We also study its performance theoretically. We have seen via simulations that our algorithm works better than the algorithm in [13] and almost as well as the algorithm in [7] even when the fusion center noise is not considered and the Multiple Access Channel (MAC) layer transmission delays are ignored in [7] and [13].

This paper is organised as follows. Section II presents the model. Section III provides DualSPRT algorithm. Theoretical performance of the algorithm is given. Section IV provides the asymptotic optimality of DualSPRT. In Section V we improve over DualSPRT. We compare the different versions so obtained and also compare them with existing asymptotically optimal decentralized sequential algorithms. Section VI extends these algorithms to consider the effect of fading and SNR uncertainty. Section VII concludes the paper.

II. SYSTEM MODEL

We consider a Cognitive Radio system with one primary transmitter and L Secondary Users. The L nodes sense the channel to detect the spectral holes. The decisions made by the Secondary Users are transmitted to a fusion node via a Multiple Access Channel (MAC) for it to make a final decision.

Let $X_{k,l}$ be the observation made at Secondary User l at time k . The $\{X_{k,l}, k \geq 1\}$ are independent and identically distributed (i.i.d.). It is assumed that the observations are independent across Cognitive Radios. Based on $\{X_{n,l}, n \leq k\}$ the Secondary User l transmits $Y_{k,l}$ to the fusion node. It is assumed that the secondary nodes are synchronised so that the fusion node receives $Y_k = \sum_{l=1}^L Y_{k,l} + Z_k$, where $\{Z_k\}$ is i.i.d. receiver noise. The fusion center uses $\{Y_k\}$ and makes a decision. The observations $\{X_{k,l}\}$ depend on whether the primary is transmitting

(Hypothesis H_1) or not (Hypothesis H_0) as

$$\text{Under } H_0 : \quad X_{k,l} = N_{k,l}, \quad k = 1, 2, \dots,$$

$$\text{Under } H_1 : \quad X_{k,l} = h_l S_k + N_{k,l}, \quad k = 1, 2, \dots,$$

where h_l is the channel gain of the l^{th} user, S_k is the primary signal and $N_{k,l}$ is the observation noise at the l^{th} user at time k . We assume $\{N_{k,l}, k \geq 1\}$ are i.i.d. Let N be the time to decide on the hypothesis by the fusion node. We assume that N is much less than the coherence time of the channel so that the slow fading assumption is valid. This means that h_l is random but remains constant during the spectrum sensing duration.

The general problem is to develop a distributed algorithm in the above setup which solves the problem:

$$\begin{aligned} \min E_{DD} &\triangleq E[N|H_i] \\ \text{subject to } P_1(\text{Reject } H_1) &\leq \alpha_1, \text{ and } P_0(\text{Reject } H_0) \leq \alpha_0, \end{aligned} \quad (1)$$

where P_i is the probability measure when H_i is the true hypothesis, $i = \{0, 1\}$, and $0 \leq \alpha_0, \alpha_1 \leq 1$. We will separately consider $E[N|H_1]$ and $E[N|H_0]$. It is well known that for a single node case ($L = 1$) Wald's SPRT performs optimally in terms of reducing $E[N|H_1]$ and $E[N|H_0]$ for given probability of errors. Motivated by the optimality of SPRT for a single node, we propose using DualSPRT in the next section and study its performance.

Throughout this paper, E_i denotes expectation under hypothesis H_i . We use P_{MD} for $P_1(\text{reject } H_1)$ and P_{FA} for $P_0(\text{reject } H_0)$. In case of E_{DD} , hypothesis under consideration can be understood from the context.

III. DECENTRALIZED SEQUENTIAL TESTS: DUALSPRT

In this section we develop DualSPRT algorithm for decentralized sequential detection.

A. DualSPRT algorithm

To explain the setup and analysis we start with the simple case, where the channel gain, $h_l = 1$ for all l 's. We will consider fading in the next section. DualSPRT is as follows:

- 1) Secondary node l , runs SPRT algorithm,

$$W_{k,l} = W_{k-1,l} + \log [f_{1,l}(X_{k,l}) / f_{0,l}(X_{k,l})], \quad k \geq 1, \quad W_{0,l} = 0 \quad (2)$$

where $f_{1,l}$ is the density of $X_{k,l}$ under H_1 and $f_{0,l}$ is the density of $X_{k,l}$ under H_0 (w.r.t. a common distribution).

- 2) Secondary node l transmits a constant b_1 at time k if $W_{k,l} \geq \gamma_1$ or transmits b_0 when $W_{k,l} \leq -\gamma_0$, i.e.,

$$Y_{k,l} = b_1 \mathbb{I}\{W_{k,l} \geq \gamma_1\} + b_0 \mathbb{I}\{W_{k,l} \leq -\gamma_0\}$$

where $\gamma_0, \gamma_1 > 0$ and $\mathbb{I}\{A\}$ denotes the indicator function of set A . Parameters $b_1, b_0, \gamma_1, \gamma_0$ are chosen appropriately.

- 3) Physical layer fusion is used at the Fusion Centre, i.e., $Y_k = \sum_{l=1}^L Y_{k,l} + Z_k$, where $\{Z_k\}$ is the i.i.d. noise at the fusion node.
- 4) Finally, Fusion center runs SPRT:

$$F_k = F_{k-1} + \log [g_{\mu_1}(Y_k) / g_{-\mu_0}(Y_k)], F_0 = 0, \mu_1, \mu_0 > 0, \quad (3)$$

where $g_{-\mu_0}$ is the density of $Z_k - \mu_0$ and g_{μ_1} is the density of $Z_k + \mu_1$, μ_0 and μ_1 being positive constants appropriately chosen.

- 5) The fusion center decides about the hypothesis at time N where

$$N = \inf\{k : F_k \geq \beta_1 \text{ or } F_k \leq -\beta_0\}$$

and $\beta_0, \beta_1 > 0$. The decision at time N is H_1 if $F_N \geq \beta_1$, otherwise H_0 .

Performance of this algorithm depends on $(\gamma_1, \gamma_0, \beta_1, \beta_0, b_1, b_0, \mu_1, \mu_0)$. Any prior information available about H_0 or H_1 can be used to decide constants. Also we choose these parameters such that the probability of false alarm/miss-detection, P_{fa}/P_{md} at local nodes is higher than P_{FA}/P_{MD} . A good set of parameters for given SNR values can be obtained from known results of SPRT.

Deciding at local nodes and transmitting them to the fusion node reduces the transmission rate and transmit energy used by the local nodes in communication with the fusion node. Also, physical layer fusion in Step 3 reduces transmission time, but requires synchronisation of different local nodes. If synchronisation is not possible, then some other MAC algorithm, e.g., TDMA can be used.

Using sequential tests at SUs and at FC (without physical layer synchronization and fusion receiver noise) has been shown to perform well in ([6], [20]). In the next section we analyse the performance under our setup.

B. Performance Analysis

We first provide the analysis for the mean detection delay E_{DD} and then for P_{FA} .

At node l , let

$$\delta_{i,l} = E_i \left[\log \frac{f_{1,l}(X_{k,l})}{f_{0,l}(X_{k,l})} \right], \rho_{i,l}^2 = Var_{H_i} \left[\log \frac{f_{1,l}(X_{k,l})}{f_{0,l}(X_{k,l})} \right].$$

We will assume $\delta_{i,l}$ finite throughout this paper. Sometimes we will also need $\rho_{i,l}^2 < \infty$. When the true hypothesis is H_1 , by Jensen's Inequality, $\delta_{1,l} > 0$. At secondary node l , SPRT $\{W_{k,l}, k \geq 0\}$ is a random walk with expected drift given by $\delta_{1,l}$.

Let

$$N_l = \inf\{k : W_{k,l} \notin (-\gamma_0, \gamma_1)\}, N_l^1 = \inf\{k : W_{k,l} > \gamma_1\} \text{ and } N_l^0 = \inf\{k : W_{k,l} < -\gamma_0\}.$$

Then $N_l = \min\{N_l^0, N_l^1\}$. Also let $N^0 = \inf\{k : F_k \leq -\beta_0\}$ and $N^1 = \inf\{k : F_k \geq \beta_1\}$. Then stopping time of DualSPRT, $N = \min(N^1, N^0)$.

In order to have $P_{FA} = P_{MD}$, we choose $\gamma_1 = \gamma_0 = \gamma$, $\beta_1 = \beta_0 = \beta$, $b_1 = -b_0 = b$ and $\mu_1 = \mu_0 = \mu$. Of course P_{FA} and P_{MD} can be taken different by appropriately choosing γ_1 , γ_0 , β_1 and β_0 and the analysis will carry over.

1) *E_{DD} Analysis:* At the fusion node F_k crosses β under H_1 when a sufficient number of local nodes transmit b_1 . The dominant event occurs when the number of local nodes transmitting are such that the mean drift of the random walk F_k will just have turned positive. In the following we find the mean time to this event and then the time to cross β after this. The E_{DD} analysis is same under hypothesis H_0 and H_1 . Hence we provide the analysis for H_1 .

The following lemmas provide justification for considering only the events $\{N_l^i\}$ and $\{N^i\}$ for analysis of $E_{DD} = E[N|H_i]$.

Lemma 1. For $i = 0, 1$, $P_i(N_l = N_l^i) \rightarrow 1$ as $\gamma \rightarrow \infty$ and $P_i(N = N^i) \rightarrow 1$ as $\gamma \rightarrow \infty$ and $\beta \rightarrow \infty$.

Proof: From random walk results ([8, Chapter IV]) we know that if a random walk has negative drift then its maximum is finite with probability one. This implies that $P_i(N_l^j < \infty) \rightarrow 0$ as $\gamma \rightarrow \infty$ for $i \neq j$ but $P_i(N_l^i < \infty) = 1$ for any $\gamma < \infty$. Thus $P_i(N_l = N_l^i) \rightarrow 1$ as $\gamma \rightarrow \infty$. This also implies that as $\gamma \rightarrow \infty$, the drift of F_k is positive for H_1 and negative for H_0 . Therefore, $P_i(N = N^i) \rightarrow 1$ as $\gamma \rightarrow \infty$ and $\beta \rightarrow \infty$. ■

Lemma 2. Under H_i , $i = 0, 1$ and $j \neq i$,

- (a) $|N_l - N_l^i| \rightarrow 0$ a.s. as $\gamma \rightarrow \infty$ and $\lim_{\gamma \rightarrow \infty} \frac{N_l}{\gamma} = \lim_{\gamma \rightarrow \infty} \frac{N_l^i}{\gamma} = \frac{1}{D(f_{i,l}||f_{j,l})}$ a.s. and in L^1 .
- (b) $|N - N^i| \rightarrow 0$ a.s. and $\lim \frac{N}{\beta} = \lim \frac{N^i}{\beta}$ a.s. and in L^1 , as $\gamma \rightarrow \infty$ and $\beta \rightarrow \infty$.

Proof: Under H_0 ,

$$N_l^0 \mathbb{I}\{N_l^0 < N_l^1\} \leq N_l \leq N_l^0, \quad (4)$$

and since $P_0[N_l^0 < N_l^1] \rightarrow 1$ as $\gamma \rightarrow \infty$, $|N_l^0 - N_l| \rightarrow 0$ a.s. as $\gamma \rightarrow \infty$. Also from Random Walk results ([8, p. 83]), $N_l^0/\gamma \rightarrow 1/D(f_{0,l}||f_{1,l})$ a.s. and $E[N_l^0]/\gamma \rightarrow 1/D(f_{0,l}||f_{1,l})$. Thus we also obtain $N_l/\gamma \rightarrow 1/D(f_{0,l}||f_{1,l})$ a.s. and in L^1 . Similarly the corresponding results hold for N and N^0 as γ and $\beta \rightarrow \infty$. (4) holds in the expected sense also. ■

Thus when γ is large, we can approximate $E_1[N_l]$ by $\gamma D(f_{1,l}||f_{0,l})$. Also under H_1 , by central limit theorem for the first passage time N_l^1 (Theorem 5.1, Chapter III in [8]),

$$N_l^1 \sim \mathcal{N}\left(\frac{\gamma}{\delta_{1,l}}, \frac{\rho_{1,l}^2 \gamma}{\delta_{1,l}^3}\right). \quad (5)$$

From Lemma 2, we can use this result for N_l also. Similarly we can obtain the results under H_0 and at the fusion node. Let $\delta_{i,FC}^j$ be the mean drift of the fusion center SPRT F_k , under H_i , when j local nodes are transmitting. Let t_j be the point at which the drift of F_k changes from $\delta_{i,FC}^{j-1}$ to $\delta_{i,FC}^j$ and let $\bar{F}_j = E[F_{t_j-1}]$, the mean value of F_k just before transition epoch t_j . The following lemma holds.

Lemma 3. Under H_i , $i = 0, 1$, as $\gamma \rightarrow \infty$,

$$P_i(\text{Decision at time } t_k \text{ is } H_i \text{ and } t_k \text{ is the } k^{\text{th}} \text{ order statistics of } N_1^i, N_2^i, \dots, N_L^i) \rightarrow 1.$$

Proof: From Lemma 1,

$$\begin{aligned} P_i(\text{Decision at time } t_k \text{ is } H_i \text{ and } t_k \text{ is the } k^{\text{th}} \text{ order statistics of } N_1^i, N_2^i, \dots, N_L^i) \\ \geq P_i(N_l^i < N_l^j, j \neq i, l = 1, \dots, L) \rightarrow 1, \text{ as } \gamma \rightarrow \infty. \end{aligned} \quad \blacksquare$$

We use Lemma 1-3 and equation (5) in the following to obtain an approximation for E_{DD} when γ and β are large. Large γ and β are needed for small probability of error. Then we can assume that the local nodes are making correct decisions.

Let

$$l^* = \min\{j : \delta_{1,FC}^j > 0 \text{ and } \frac{\beta - \bar{F}_j}{\delta_{1,FC}^j} < E[t_{j+1}] - E[t_j]\}.$$

$\bar{F}_j$ can be iteratively calculated as

$$\bar{F}_j = \bar{F}_{j-1} + \delta_{1,FC}^j (E[t_j] - E[t_{j-1}]), \bar{F}_0 = 0. \quad (6)$$

Note that $\delta_{1,FC}^j$ ($0 \leq j \leq L$) is assumed to be j and t_j is the j^{th} order statistics of $\{N_l^1, 0 \leq l \leq L\}$. The Gaussian approximation (5) can be used to calculate the expected value of the order statistics using the method given in [3]. This implies that $E[t_j]$'s and hence $\bar{F}_j$'s are available offline. By using these values E_{DD} ($\approx E_1(N^1)$) can be approximated as

$$E_{DD} \approx E[t_{l^*}] + \frac{\beta - \bar{F}_{l^*}}{\delta_{1,FC}^{l^*}}, \quad (7)$$

where the first term on R.H.S. is the mean time till the drift becomes positive at the fusion node while the second term indicates the mean time for F_k to cross β from t_{l^*} onward.

2) P_{MD}/P_{FA} Analysis: We provide analysis under H_1 . P_{FA} analysis is same as that of P_{MD} analysis with necessary changes. When the thresholds at local nodes are reasonably large, according to Lemma 3, with a large probability local nodes are making the right decisions and t_k can be taken as the order statistics assuming that all local nodes make the right decisions. Then P_{MD} at the fusion node, when H_1 is the true hypothesis, is given by,

$$P_{MD} = P_1(\text{accept } H_0) = P_1(N_0 < N_1).$$

It can be easily shown that $P_1(N_1 < \infty) = 1$ for any $\beta > 0$. Also $P_1(N_0 < \infty) \rightarrow 0$ as $\beta \rightarrow \infty$. We should decide the different thresholds such that $P_1(N_1 < t_1)$ is small for reasonable performance. Therefore

$$P_{MD} = P_1(N_0 < N_1) \geq P_1(N_0 < t_1, N_1 > t_1) \approx P_1(N_0 < t_1). \quad (8)$$

Also,

$$P_1(N_0 < N_1) \leq P_1(N_0 < \infty) = P_1(N_0 < t_1) + P_1(t_1 \leq N_0 < t_2) + P_1(t_2 \leq N_0 < t_3) + \dots \quad (9)$$

One expects that the first term in the right hand side should be the dominant term. This is because, from Lemma 3, after t_1 , the drift of F_k will be most likely more positive than before t_1 (if P_{FA} at local nodes are reasonably small) and cause fewer errors if the fusion center threshold is chosen appropriately. We have verified this from simulations also. Hence we focus on the first term. Combining this fact with (8), $P_1(N_0 < t_1)$ will be a good approximation for $P_1(\text{reject } H_1)$.

Let $S_k = \log [g_1(Y_k) / g_0(Y_k)]$. Then $F_k = S_1 + S_2 + \dots + S_k$ and if we assume that S_k before t_1 , has mean zero and has distribution symmetric about zero (e.g., $\sim \mathcal{N}(0, \sigma^2)$) then,

$$P_1(\text{reject } H_1 \text{ before } t_1)$$

$$\begin{aligned}
&\approx \sum_{k=1}^{\infty} P_1 \left[\{F_k < -\beta\} \cap_{n=1}^{k-1} \{F_n > -\beta\} | t_1 > k \right] P[t_1 > k] \\
&= \sum_{k=1}^{\infty} \left(P_1 \left[F_k < -\beta | \cap_{n=1}^{k-1} \{F_n > -\beta\} \right] P_1 \left[\cap_{n=1}^{k-1} \{F_n > -\beta\} \right] \right) \left(1 - \Phi_{t_1}(k) \right) \\
&\stackrel{(A)}{=} \sum_{k=1}^{\infty} \left(P_1[F_k < -\beta | F_{k-1} > -\beta] P_1 \left[\inf_{1 \leq n \leq k-1} F_n > -\beta \right] \right) \left(1 - \Phi_{t_1}(k) \right) \\
&\stackrel{(B)}{\geq} \sum_{k=1}^{\infty} \left(\int_{c=0}^{\infty} P_1[S_k < -c] f_{F_{k-1}}\{-\beta + c\} dc \right) \left(1 - 2P_1[F_{k-1} \leq -\beta] \right) \left(1 - \Phi_{t_1}(k) \right),
\end{aligned}$$

where Φ_{t_1} is the Cumulative Distribution Function of t_1 . Since we are considering only $\{F_k, k \leq t_1\}$, we remove the dependencies on t_1 . In the above equations (A) is because of the Markov property of the random walk and (B) is due to the following lemma.

Lemma 4. *If S_1 has mean zero and distribution symmetric about zero,*

$$P \left[\inf_{1 \leq n \leq k-1} F_n > -\theta \right] \geq 1 - 2P[F_{k-1} \leq -\theta].$$

Proof: For random walk F_k with mean zero and symmetric distribution, [4, p. 525],

$$P \left[\sup_{1 \leq n \leq k-1} F_n \geq \theta \right] \leq 2P[F_{k-1} \geq \theta]. \quad (10)$$

This implies

$$P \left[\sup_{1 \leq n \leq k-1} (-F_n) \geq \theta \right] \leq 2P[(-F_{k-1}) \geq \theta].$$

Therefore,

$$P \left[\inf_{1 \leq n \leq k-1} F_n \leq -\theta \right] \leq 2P[F_{k-1} \leq -\theta]$$

and hence

$$P \left[\inf_{1 \leq n \leq k-1} F_n > -\theta \right] \geq 1 - 2P[F_{k-1} \leq -\theta].$$

■

Similarly we can write an upper bound by replacing $P[\cap_{n=1}^{k-1} \{F_n > -\theta\}]$ with $P[F_{k-1} > -\theta]$.

We can make the lower bound tighter if we do the same analysis for the random walk between t_1 and t_2 with appropriate changes and add to the above bounds.

3) *Example I:* We apply the DualSPRT on the following example and compare the E_{DD} and P_{FA} via analysis provided above with the simulation results. We assume that f_0 and f_1 are Gaussian with different means. This model is relevant when the noise and interference are log-normally distributed ([22]), and when $X_{k,l}$ is the sum of energy of a large number of observations at the secondary nodes at a low SNR.

Parameters used for simulation are as follows: There are 5 secondary nodes, $L = 5$, $f_0 \sim \mathcal{N}(0, 1)$ and $f_1 \sim \mathcal{N}(1, 1)$, where $\mathcal{N}(a, b)$ denotes Gaussian distribution with mean a and variance b . Also $f_0 = f_{0,l}$ and $f_1 = f_{1,l}$ for $1 \leq l \leq L$, and $b = 1$. The P_{MD}/P_{FA} and the corresponding E_{DD} are provided in Table I. The parameters are chosen to provide good performance for the given P_{MD}/P_{FA} . The table also contains the results obtained via analysis. We see a good match in theory and simulations. The above example is for the case when $X_{k,l}$ have the same distribution

$P_{MD}Sim.$	$P_{MD}Anal.$	$E_{DD}Sim.$	$E_{DD}Anal.$	$P_{FA}Sim.$	$P_{FA}Anal.$	$E_{DD}Sim.$	$E_{DD}Anal.$
0.00125	0.0012	15.6716	16.4216	0.0613	0.0497	11.803	10.583
0.01610	0.0129	13.928	12.6913	0.0031	0.0027	15.1766	14.830

(a) Under H_1 (b) Under H_0

TABLE I: DualSPRT: Comparison of E_{DD} and P_{MD}/P_{FA} obtained via analysis (lower bound on the dominating term) and simulation.

for different l under the hypothesis H_0 and H_1 . However in practice the $X_{k,l}$ for different local nodes l will often be different because their receiver noise can have different variances and/or the path losses from the primary transmitter to the secondary nodes can be different. An example is provided here to illustrate the application of the above analysis to such a scenario. Now the order statistics t_{l^*} in (7) needs to be appropriately computed.

4) *Example II:* There are five secondary nodes with primary to secondary channel gain being 0, -1.5, -2.5, -4 and -6 dB respectively (corresponding post change means are 1, 0.84, 0.75, 0.63, 0.5). $f_0 \sim \mathcal{N}(0, 1)$, $f_0 = f_{0,l}$ for $1 \leq l \leq L$. Table II provides the E_{DD} and P_{FA} via analysis and simulations. We see a good match.

IV. ASYMPTOTIC OPTIMALITY OF DUALSPRT

The two hypotheses H_0 and H_1 are assumed to have known prior probabilities π and $1 - \pi$ respectively. A cost c (≥ 0) is assigned to each time step taken for decision. Let $W_i > 0$, $i = 0, 1$

$P_{FA}Sim.$	$P_{FA}Anal.$	$E_{DD}Sim.$	$E_{DD}Anal.$
$18.78e-4$	$19.85e-4$	44.319	43.290
$26.68e-4$	$27.51e-4$	36.028	34.634
$36.30e-4$	$35.16e-4$	27.770	25.977

TABLE II: DualSPRT for different SNR's between the primary and the Secondary Users: Comparison of E_{DD} and P_{FA} obtained via analysis and simulation.

be the cost of falsely rejecting H_i . Then Bayes risk of a test δ with stopping time N is defined as

$$\mathcal{R}_c(\delta) = \pi[cE_0(N) + W_0P_0\{reject H_0\}] + (1 - \pi)[cE_1(N) + W_1P_1\{reject H_1\}]. \quad (11)$$

Also, KL-divergence of two probability distributions P and Q on the same measurable space $(\Omega, \mathcal{F})$ is defined as

$$D(P||Q) = \begin{cases} \int \log \frac{dP}{dQ} dP & , \text{ if } P \ll Q, \\ \infty & , \text{ otherwise, } \end{cases} \quad (12)$$

where $P \ll Q$ denotes that P is absolutely continuous w.r.t. Q . We also use the following notation:

$$D_{tot}^0 = \sum_{l=1}^L D(f_{0,l}||f_{1,l}), \quad D_{tot}^1 = \sum_{l=1}^L D(f_{1,l}||f_{0,l}), \quad r_l = \frac{D(f_{0,l}||f_{1,l})}{D_{tot}^0}, \quad \rho_l = \frac{D(f_{1,l}||f_{0,l})}{D_{tot}^1}.$$

Let $\mathcal{A}^i(c)$ be the event that all the Secondary Users transmit b_i when the true hypothesis is H_i . Also let $\Delta(\mathcal{A}^i)$ be the drift of the fusion center LLR process F_k when the $\mathcal{A}^i$ happens, i.e., $\Delta(\mathcal{A}^i) = E_i \left[\left(\log \frac{g_{\mu_1}(Y_k)}{g_{-\mu_0}(Y_k)} \right) | \mathcal{A}^i \right]$. We will also need

$$\tau_l(c) \triangleq \sup \left\{ n \geq 1 : \sum_{i=1}^n \log \frac{f_{1,l}(X_{i,l})}{f_{0,l}(X_{i,l})} \geq -|\log c| \right\}, \quad \tau(c) \triangleq \max_{1 \leq l \leq L} \tau_l(c). \quad (13)$$

It can be seen that $\tau_l(c)$ is the last time random walk with drift $\delta_{0,l} < 0$, will be above $-|\log c|$.

We make the following assumptions for Theorem 1 and Theorem 2.

(A1) $\{X_{k,l}, k \geq 0\}$ is i.i.d. and independent of $\{X_{k,j}, k \geq 0\}$ for all $l \neq j$.

(A2) The following hold, for each l ,

$$\int \left(\log \left(\frac{f_{1,l}(x)}{f_{0,l}(x)} \right) \right)^2 f_{1,l}(x) dx < \infty \text{ and } \int \left(\log \left(\frac{f_{0,l}(x)}{f_{1,l}(x)} \right) \right)^2 f_{0,l}(x) dx < \infty.$$

In the rest of this section, local node thresholds are $\gamma_{0,l} = -r_l |\log c|, \gamma_{1,l} = \rho_l |\log c|$ and fusion center thresholds are $\beta_0 = -|\log c|, \beta_1 = |\log c|$.

We use θ_i as the mean of the drift of fusion center random walk F_k when all the local nodes transmit wrong decisions under H_i and σ^2 as the variance of the drift, which is independent of local node decisions. For convenience in the following theorem, we take $\mu_1 = \mu_0 = \mu > 0$ and $b_1 = -b_0 = b > 0$.

Theorem 1. For DualSPRT with the assumptions $A(1) - A(2)$,

$$\lim_{c \rightarrow 0} \frac{E_0[N]}{|\log c|} \leq \frac{1}{D_{tot}^0} + M_0 \text{ and } \lim_{c \rightarrow 0} \frac{E_1[N]}{|\log c|} \leq \frac{1}{D_{tot}^1} + M_1,$$

where M_0 and M_1 are of the form $C_0/\Delta(\mathcal{A}^0)$ and $C_1/\Delta(\mathcal{A}^1)$ respectively, where C_0 and C_1 are constants.

Proof: See Appendix A. ■

Remark 1. If we assume fusion center noise as $\mathcal{N}(0, \sigma_{FC}^2)$, then $\Delta(\mathcal{A}^0) = -2\mu Lb/\sigma_{FC}^2$ and $\Delta(\mathcal{A}^1) = 2\mu Lb/\sigma_{FC}^2$. Therefore M_0 and M_1 in Theorem 1 $\rightarrow 0$ if $\mu \rightarrow \infty$ and/or $b \rightarrow \infty$ and/or $\sigma_{FC}^2 \rightarrow 0$.

Table III compares the asymptotic upper bounds of E_{DD} from Theorem 1 with the analysis given in Section III-B and simulations. We use the example provided in Section III-B3 and assume $\pi_0 = 0.5$. We see that the approximate analysis of Section III-B provides much better approximation at threshold values of practical interest in Cognitive Radio. Perhaps this is the reason, the asymptotically optimal schemes do not necessarily provide very good performance at operating points of practical interest.

$P_{FA} Simn.$	$E_{DD} Simn.$	$E_{DD} Anal.$	$E_{DD} Asym.$	$P_{FA} Simn.$	$E_{DD} Simn.$	$E_{DD} Anal.$	$E_{DD} Asym.$
0.01610	13.928	12.6913	19.35	0.0613	11.803	10.583	18.26
0.00125	15.6716	16.4216	21.17	0.0031	15.1766	14.830	20.81

(a) Under H_1
(b) Under H_0

TABLE III: Comparison of E_{DD} obtained via simulation, analysis and asymptotics.

Let $R_i = \min_{1 \leq l \leq L} \left(-\log \inf_{t \geq 0} E_i \left[\exp \left(-t \log \frac{f_{1,l}(X_{1,l})}{f_{0,l}(X_{1,l})} \right) \right] \right)$ and φ_i^l be the minimal value such that $E_i \left[\exp \left(-\varphi_i^l \log \frac{f_{1,l}(X_{1,l})}{f_{0,l}(X_{1,l})} \right) \right] = e^\eta$ for $\eta > 0$ and $\varphi_i = \sum_{l=1}^L \varphi_i^l$. Let $\xi_k = \log \frac{g_{\mu_1}(Y_k)}{g_{-\mu_0}(Y_k)}$. Then $F_n = \sum_{k=1}^n \xi_k$ and $\mu_i(k) = E_i[\xi_k]$. We assume the fusion center noise is $\mathcal{N}(0, \sigma_{FC}^2)$. The following lemma will be needed in the next theorem.

Lemma 5. If $\mu < \min \left(\sqrt{\frac{R_0 \sigma_{FC}^2}{8}}, \frac{R_0 \sigma_{FC}^2}{4Lb} \right)$, then $E_0 [e^{\eta_1 F_{\tau(c)}}] < \infty$ for $0 < \eta_1 < R^*$ and $R^* > 1$.

Proof: See Appendix B. ■

Theorem 2. Assume $A(1) - A(2)$. Let $\mu < \min \left(\sqrt{\frac{R_0 \sigma_{FC}^2}{8}}, \frac{R_0 \sigma_{FC}^2}{4Lb} \right)$ and the fusion center noise be Gaussian. If $\frac{\eta + \frac{\theta_0^2}{2\sigma^2}}{2(\sigma^2 + \theta_0)} \geq 1 + \varphi_0 + \frac{\theta_0}{\sigma^2}$, for some $0 < \eta < R_0$, then $\lim_{c \rightarrow 0} \frac{P_{FA}}{c |\log c|} = 0$. Also if $\frac{\eta + \frac{\theta_1^2}{2\sigma^2}}{2(\sigma^2 + \theta_1)} \geq 1 + \varphi_1 + \frac{\theta_1}{\sigma^2}$, for some $0 < \eta < R_1$, then $\lim_{c \rightarrow 0} \frac{P_{MD}}{c |\log c|} = 0$.

Proof: See Appendix C. ■

Let $\mathcal{R}_c(\delta_{cent.})$ and $\mathcal{R}_c(\delta_{DualSPRT})$ be the Bayes's Risk function of the optimal centralized SPRT without considering fusion center noise and of DualSPRT respectively. For optimal centralized SPRT without considering fusion center noise, ([13, p. 2076]),

$$\lim_{c \rightarrow 0} \frac{\mathcal{R}_c(\delta_{cent.})}{c |\log c|} = \left(\frac{\pi}{D_{tot}^0} + \frac{1 - \pi}{D_{tot}^1} \right).$$

From Theorem 1 and Theorem 2, using (11), for DualSPRT with Gaussian fusion center noise,

$$\lim_{c \rightarrow 0} \frac{\mathcal{R}_c(\delta_{DualSPRT})}{c |\log c|} = \left(\frac{\pi}{D_{tot}^0} + \frac{1 - \pi}{D_{tot}^1} + C \right),$$

where $C = M_0\pi + M_1(1 - \pi)$. The constant $C \rightarrow 0$ if we assume b_i and/or μ as a linear function of $|\log c|$. This shows that DualSPRT is asymptotically Bayes in the centralized setting, i.e., $\lim_{c \rightarrow 0} \mathcal{R}_c(\delta_{cent.})/\mathcal{R}_c(\delta_{DualSPRT}) = 1$.

Remark 2. By observing that [13, Theorem 1] remains applicable for DualSPRT, from [13, Theorem 2], DualSPRT is also asymptotically Bayes with respect to the Bayes solution in the system with full local memory and without considering fusion center noise.

Remark 3. As the cost c decreases, essentially we are allowing more samples for detection, which is captured in the modified expressions of $\gamma_{0,l}$, $\gamma_{1,l}$, β_0 and β_1 .

For Gaussian input observations at the local nodes, assuming $f_{1,l} = f_1$, $f_{0,l} = f_0$ for $1 \leq l \leq L$, we get $\delta_{i,l} = \delta_i$ and $\rho_{i,l} = \rho_i$, $R_i = \frac{\delta_i^2}{2\rho_i^2}$ and $\varphi_i = \frac{L\delta_i}{\rho_i^2}(1 - 1/\sqrt{2})$.

Using Lemma 1, θ_0 and θ_1 can be taken as zero. Assume $H_0 : \mathcal{N}(0, 1)$ and $\sigma_{FC}^2 = 1$. For SNR values -4dB ($H_1 : \mathcal{N}(0.63, 1)$), -10dB ($H_1 : \mathcal{N}(0.3162, 1)$) and -15dB ($H_1 : \mathcal{N}(0.1778, 1)$), the conditions in the Theorem 2 are satisfied with μ in Lemma 5.

V. DECENTRALIZED SEQUENTIAL TESTS: SPRT-CSPRT

This section considers some improvements over DualSPRT. The improved algorithms are theoretically analysed and their performance is compared with existing decentralized schemes.

A. New Algorithms: SPRT-CSPRT and DualCSPRT

In DualSPRT presented in Section III-A, observations $\{Y_k\}$ to the fusion center are not always identically distributed. Till the first transmission from secondary nodes, these observations come from i.i.d. noise distribution. But after the transmission from the first local node till the transmission from the second node, Y_k 's are distributed as i.i.d. noise distribution with a different mean. Thus the observations at the fusion center are no longer i.i.d.. Since the non-asymptotic optimality of SPRT is known for i.i.d. observations only ([21]), using SPRT at the fusion center is not optimal although we have shown it to be asymptotically optimal.

We improve DualSPRT with the following modifications. Steps (1)-(3) (corresponding to the algorithm run at the local nodes) are same as in DualSPRT. The steps (4) and (5) are replaced by:

4) Fusion center runs two algorithms:

$$F_k^1 = (F_{k-1}^1 + \log [g_{\mu_1}(Y_k) / g_Z(Y_k)])^+, F_0^1 = 0, \quad (14)$$

$$F_k^0 = (F_{k-1}^0 + \log [g_Z(Y_k) / g_{-\mu_0}(Y_k)])^-, F_0^0 = 0, \quad (15)$$

where $(x)^+ = \max(0, x)$, $(x)^- = \min(0, x)$ and μ_1 and μ_0 are positive constants. g_Z is the pdf of i.i.d. noise $\{Z_k\}$ at the fusion center and g_μ indicates the pdf of $\mu + Z_k$.

5) The fusion center decides about the hypothesis at time N where

$$N = \inf\{k : F_k^1 \geq \beta_1 \text{ or } F_k^0 \leq \beta_0\}$$

and $\beta_0 < 0 < \beta_1$. The decision at time N is H_1 if $F_N^1 \geq \beta_1$, otherwise H_0 .

The following discussion provides motivation for this test.

1) A sample path of the fusion center SPRT under the hypothesis H_1 is provided in Figure 1.

If the SPRT sum defined in (3) goes below zero it delays in crossing the positive threshold β_1 . Hence if we keep SPRT sum at zero whenever it goes below zero, it reduces E_{DD} . This happens in CUSUM ([14]). Similarly one can use a CUSUM statistic under H_0 also. These ideas are captured in (14) and (15).

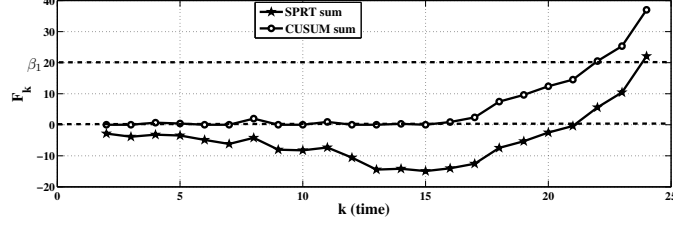


Fig. 1: Sample Path of F_k under SPRT Sum and CSPRT Sum for $\gamma_1 = 8$, $\beta_1 = 20$, $\mu_1 = 2$ and $\mu_0 = -2$.

- 2) The proposed test is also capable of reducing false alarms caused by noise Z_k before first transmission (t_1) from the local nodes. For F_k^1 and F_k^0 to move away from zero, the drifts should be positive and negative respectively. Let $\hat{\mu}_k = E[Y_k]$ at time k . Then expected drift of F_k^1 is

$$E_{\hat{\mu}_k} \left[\log \frac{g_{\mu_1}(Y_k)}{g_Z(Y_k)} \right] = D(g_{\hat{\mu}_k} || g_Z) - D(g_{\hat{\mu}_k} || g_{\mu_1}). \quad (16)$$

Hence before first transmission from the local nodes positive expected drift is not possible. After first transmission under H_1 (assuming the local nodes make correct decisions, the justification for which is provided in Section III), the drift becomes more positive. Similarly for F_k^0 . But in case of DualSPRT, SPRT at the fusion center has drift given by $\log \frac{g_{\mu_1}(Y_k)}{g_{-\mu_0}(Y_k)}$. This drift is difficult to keep zero only before t_1 and thus creates more errors due to noise Z_k .

- 3) Even though the problem under consideration is hypothesis testing, this is essentially a change detection problem at the fusion center. The observations at the fusion center have the distribution of noise before t_1 and after t_1 the mean changes. But in our scenario, this is a composite sequential change detection problem with the observations that are not i.i.d. and we look for change in both directions, it is difficult to use existing algorithms available for sequential change detection. Nevertheless our test provides a guaranteed performance in this scenario.

We consider one more improvement. When a local Cognitive Radio SPRT sum crosses its threshold, it transmits b_1/b_0 . This node transmits till the fusion center SPRT crosses the threshold. If it is not a false alarm, then its SPRT sum keeps on increasing (decreasing). But if it is a false alarm, then the sum will eventually move towards the other threshold. Hence instead of transmitting b_1/b_0 the Cognitive Radio can transmit a higher / lower value in an intelligent

fashion. This should improve the performance. Thus we modify step (3) in DualSPRT as,

$$Y_{k,l} = \sum_{i=1}^4 b_i^1 \mathbb{I}\{W_{k,l} \in [\gamma_1 + (i-1)\Delta_1, \gamma_1 + i\Delta_1)\} + b_i^0 \mathbb{I}\{W_{k,l} \in [-\gamma_0 - (i-1)\Delta_1, -\gamma_0 - i\Delta_0)\} \quad (17)$$

where Δ_1 and Δ_0 are the parameters to be tuned at the Cognitive Radio. $4\Delta_1$ and $4\Delta_0$ are taken as ∞ . The expected drift under H_1 (H_0) is a good choice for Δ_1 (Δ_0).

We call the algorithm with the above two modifications as SPRT-CSPRT (with ‘C’ as an indication about the motivation from CUSUM).

If we use CSPRT at both the secondary nodes and the fusion center with the proposed quantisation methodology (we call it DualCSPRT) it works better as we will show via simulations in Section V-B. In Section V-C we will theoretically analyse SPRT-CSPRT. As the performance of DualCSPRT (Figure 2a) is closer to that of SPRT-CSPRT, we analyse only SPRT-CSPRT.

B. Performance Comparison


Throughout the section we use $\gamma_1 = \gamma_0 = \gamma$, $\beta_1 = \beta_0 = \beta$ and $\mu_1 = \mu_0 = \mu$ for the simplicity of simulations and analysis.

We apply DualSPRT, SPRT-CSPRT and DualCSPRT on the following example and compare their E_{DD} for various values of P_{MD} . We assume that the pre-change distribution f_0 and the post change distribution f_1 are Gaussian with different means.

For simulations we have used the following parameters. There are 5 nodes ($L = 5$) and $f_{0,l} \sim \mathcal{N}(0, 1)$, for $1 \leq l \leq L$. Primary to secondary channel gains are 0, -1.5 , -2.5 , -4 and $-6dB$ respectively (the corresponding post change means of Gaussian distribution with variance 1 are 1, 0.84, 0.75, 0.63 and 0.5). We assume $Z_k \sim \mathcal{N}(0, 5)$ and the drift of DualSPRT and SPRT-CSPRT at the fusion center is taken as $2\mu Y_k$, with μ being 1. We also take $D_0 = D_1 = 0$, $\{b_1^1, b_2^1, b_3^1, b_4^1\} = \{1, 2, 3, 4\}$, $\{b_1^0, b_2^0, b_3^0, b_4^0\} = \{-1, -2, -3, -4\}$ and $b_1 = -b_0 = 1$ (for DualSPRT). Parameters γ and β are chosen from a range of values to achieve a particular P_{FA} . Figure 2a provides the E_{DD} and P_{MD} via simulations. We see a significant improvement in E_{DD} compared to DualSPRT. The difference increases as P_{MD} decreases. The performance under H_0 is similar.

Performance comparisons with the asymptotically optimal decentralized sequential algorithms which do not consider fusion center noise (DSPRT [7], Mei’s SPRT [13]) are given in Figure 2b. Note that DualSPRT and SPRT-CSPRT include fusion center noise. Here we take $f_{0,l} \sim \mathcal{N}(0, 1)$, $f_{1,l} \sim \mathcal{N}(1, 1)$ for $1 \leq l \leq L$ and $Z_k \sim \mathcal{N}(0, 1)$. We find that the performance of SPRT-CSPRT

is close to that of DSPRT and better than Mei's SPRT. Similar comparisons were obtained with other data sets.

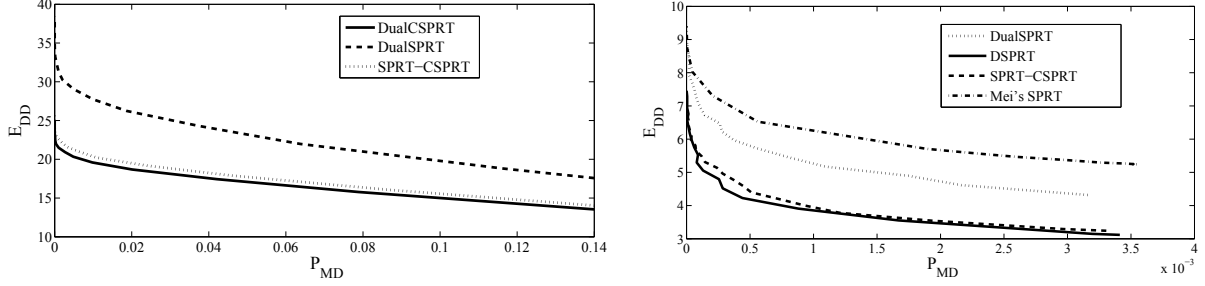

(a) Comparison among DualSPRT, SPRT-CSPRT and DualCSPRT for different SNR's between the Primary and the secondary users, under H_1 . (b) Comparison among DualSPRT, SPRT-CSPRT, Mei's SPRT and DSPRT under H_1 .

Fig. 2: Comparisons with SPRT-CSPRT

C. Performance Analysis of SPRT-CSPRT

E_{DD} and P_{MD}/P_{FA} analysis is same under H_1 and H_0 . Hence we provide analysis under H_1 only.

1) P_{MD} Analysis: Between each change of drift (which occurs due to the change in number of Cognitive Radios transmitting to the fusion node and due to the change in the value transmitted according to the quantisation rule (17)) at the fusion center, under H_1 , (14) has a positive drift and behaves approximately like a normal random walk. Under H_1 (15) also has a positive drift, but due to the min in its expression it will stay around zero and as the event of crossing negative threshold is rare (15) becomes a reflected random walk between each drift change. Similarly under H_0 , (14) and (15) become reflected random walk and normal random walk respectively. The false alarm occurs when the reflected random walk crosses its threshold.

Under H_1 , let

$$\tau_\beta \triangleq \inf\{k \geq 1 : F_k^0 \leq -\beta\} \text{ and } T_\beta \triangleq \inf\{k \geq 1 : F_k^1 \geq \beta\}. \quad (18)$$

Following the same argument in Section III-B2 P_{FA} analysis, we get,

$$P_1(\text{reject } H_1) = P_1(\tau_\beta < T_\beta) \approx P_1(\tau_\beta < t_1).$$

$$P_1(\tau_\beta < t_1) = \sum_{k=1}^{\infty} P_1(\tau_\beta \leq k, k < t_1) = \sum_{k=1}^{\infty} P_1(\tau_\beta \leq k | k < t_1) P_1(t_1 > k). \quad (19)$$

In the following we compute $P_1(\tau_\beta > x | \tau_\beta < t_1)$ and $P_1(t_1 > k)$. It is shown in [17] that,

$$\lim_{\beta \rightarrow \infty} P_1\{\tau_\beta > x | \tau_\beta < t_1\} = \exp(-\lambda_\beta x), \quad x > 0, \quad (20)$$

where λ_β is obtained by finding solution to an integral equation obtained via renewal arguments ([18]). Let $L(s)$ be the mean of τ_β with $F_0^0 = s$ and $S_k = \log[g_Z(Y_k)/g_{-\mu_0}(Y_k)]$. Note that $\{S_k, k < t_1\}$ are i.i.d. From the renewal arguments, by conditioning on $S_1 = z$,

$$L(s) = P(S_1 > -s)(L(0) + 1) + \int_{-\beta-s}^{-s} (L(s+z) + 1) dF_{S_1}(z) dz + F_{S_1}(-\beta-s),$$

where F_S is the distribution of S_k before the first transmission from the local nodes. This is a Fredholm integral equation of the second kind ([19]). Existence of a unique solution for it is shown in [2]. By solving these equations numerically, we get $\lambda_\beta = 1/L(0)$.

From the central limit theorem approximation given in Section III-B1 we can find the distribution of t_1 . Thus (19) provides,

$$P_1(\text{False alarm before } t_1) \approx \sum_{k=1}^{\infty} (1 - e^{-\lambda_\beta k}) \prod_{l=1}^L (1 - \Phi_{N_l}(k)),$$

where Φ_{N_l} is the Cumulative Distribution Function of N_l , obtained from the Gaussian approximation.

2) *E_{DD} Analysis*: In this section we compute E_{DD} theoretically. Recall that t_i also indicates the first time at which i local nodes are transmitting. Mean of t_i can be computed from the method explained in [3], for finding k^{th} central moment of non i.i.d. i^{th} order statistics.

Between t_i and t_{i+1} the drift at the fusion center is not necessarily constant because there are four thresholds (each corresponds to different quantizations) at the secondary node. The transmitted value changes after crossing each threshold, $b_1 \rightarrow b_2 \dots \rightarrow b_4$. Let $t_i^j, 1 \leq j \leq 3$ be the time points at which a node changes the transmitting values from b_j to b_{j+1} between t_i and t_{i+1} . We assume that with a high probability the secondary node with the lowest first passage time mean will transmit first, the node with the second lowest mean will transmit second and so on. This is justified by the fact that the distribution of a first passage time of $\gamma > 0$ by a random walk with mean drift $\delta > 0$ and variance σ^2 is $\mathcal{N}(\frac{\gamma}{\delta}, \frac{\sigma^2 \gamma}{\delta^3})$. Thus if δ is large, the mean γ/δ is small and the variance $\sigma^2 \gamma/\delta^3$ is much smaller. In the following we will make computations under these approximations. The time difference between t_i^{jth} and t_{i+1}^{jth} transmission can be calculated if we take the second assumption ($=\Delta_1/\delta_{1,l}$). We know $E[t_i]$ for every i from an argument given earlier. Suppose l^{th} node transmits at t_i^{th} instant and if $E[t_i] + \Delta_1/\delta_{1,l} < E[t_{i+1}]$ then

$E[t_i^1] = E[t_i] + \Delta_1/\delta_{1,l}$. Similarly if $E[t_i^1] + \Delta_1/\delta_{1,l} < E[t_{i+1}]$ then $E[t_i^2] = E[t_i^1] + \Delta_1/\delta_{1,l}$ and so on. Let us represent the sequence $t = \{t_1, t_1^1, t_1^2, t_1^3, t_2, \dots, t_5^5\}$ (entry only for existing ones by the above criteria) by $T = \{T_1, T_2, T_3, \dots\}$.

Let $\delta_{i,FC}^k$ be the mean drift at the fusion center between T_k and T_{k+1} , under H_i . Thus T_k 's are the transition epochs at which the fusion center drift changes from $\delta_{i,FC}^{k-1}$ to $\delta_{i,FC}^k$. Also let $\bar{F}_k = E[F_{T_k-1}]$ be the mean value of F_k just before the transition epoch T_k . With the assumption of the very low P_{fa} at the local nodes and from the knowledge of the sequence t we can easily calculate $\delta_{1,FC}^k$ for each T_k . Similarly $\bar{F}_{k+1} = \bar{F}_k + \delta_{1,FC}^k(E[T_{k+1}] - E[T_k])$. Then,

$$E_{DD} \approx E[T_{l^*}] + \frac{\beta - \bar{F}_{l^*}}{\delta_{1,FC}^{l^*}} \quad (21)$$

where

$$l^* = \min\{j : \delta_{1,FC}^j > 0 \text{ and } \frac{\beta - \bar{F}_j}{\delta_{1,FC}^j} < E[T_{j+1}] - E[T_j]\}.$$

The above approximation of E_{DD} is based on Central Limit Theorem and Law of Large Numbers and hence is valid for any distributions with finite second moments.

Table IV provides the simulation and corresponding analysis values. We used the same set-up as in Section V-B (with $Z_k \sim \mathcal{N}(0, 1)$).

$P_{MD}Sim.$	$P_{MD}Anal.$	$E_{DD}Sim.$	$E_{DD}Anal.$
0.01675	0.01624	26.8036	24.9853
0.0072	0.0065	30.0817	29.1322
0.00686	0.00623	36.1585	35.5624

TABLE IV: Comparison of E_{DD} and P_{MD} obtained via analysis and simulation under H_1 for SPRT-CSPRT.

VI. UNKNOWN RECEIVED SNRS AND FADING

This section considers the extensions of DualSPRT and SPRT-CSPRT to take care of the SNR uncertainty and the slow fading between the Primary User and a Cognitive Radio. Since the transmissions from CR to FC are in CR network, we assume reporting channel to FC as AWGN only. This assumption is commonly made ([1], [22])

A. Different and unknown SNRs

We consider the case where the received signal power from the PU to a CR node is fixed but not known to the local Cognitive Radio nodes. This can happen if the transmit power of the primary is not known and/or there is unknown shadowing. Now we limit ourselves to the energy detector where the observations $X_{k,l}$ are average energy of M samples received by the l^{th} Cognitive Radio node. Then for somewhat large M , the pre and post change distributions of $X_{k,l}$ can be approximated by Gaussian distributions: $f_{0,l} \sim \mathcal{N}(\sigma_l^2, 2\sigma_l^4/M)$ and $f_{1,l} \sim \mathcal{N}(P_l + \sigma_l^2, 2(P_l + \sigma_l^2)^2/M)$, where P_l is the received power and σ_l^2 is the noise variance at the l^{th} CR node. Under low SNR conditions $(P_l + \sigma_l^2)^2 \approx \sigma_l^4$ and hence $X_{k,l}$ are Gaussian distributed with mean change under H_0 and H_1 . Now taking $X_{k,l} - \sigma_l^2$ as the data for the detection algorithm at the l^{th} node, since P_l is unknown we can formulate this problem as a sequential hypothesis testing problem with

$$H_0 : \theta = 0; H_1 : \theta \geq \theta_1, \quad (22)$$

where θ is P_l under H_1 and θ_1 is appropriately chosen.

The problem

$$H_0 : \theta \leq \theta_0; H_1 : \theta \geq \theta_1, \quad (23)$$

subject to $P_\theta\{\text{reject } H_0\} \leq \alpha$, for $\theta \leq \theta_0$ and $P_\theta\{\text{reject } H_1\} \leq \beta$, for $\theta \geq \theta_1$,

for exponential family of distributions is well studied in ([12]). The following algorithm of Lai [12] is asymptotically Bayes optimal and hence we use it at the local nodes instead of SPRT.

Let $\theta \in A = [a_1, a_2]$. Define

$$W_{n,l} = \max \left[\sum_{k=1}^n \log \frac{f_{\hat{\theta}_n}(X_k)}{f_{\theta_0}(X_k)}, \sum_{k=1}^n \log \frac{f_{\hat{\theta}_n}(X_k)}{f_{\theta_1}(X_k)} \right], \quad N(g, c) = \inf \{n : W_{n,l} \geq g(nc)\}, \quad (24)$$

where $g()$ is a time varying threshold. The function g satisfies $g(t) \approx \log(1/t)$ as $t \rightarrow 0$ and is the boundary of an associated optimal stopping problem for the Wiener process ([12]). $\hat{\theta}_n$ is the Maximum-Likelihood estimate of θ bounded by a_1 and a_2 . For Gaussian f_0 and f_1 , $\hat{\theta}_n = \max\{a_1, \min[S_n/n, a_2]\}$. At time $N(g, c)$ decide upon H_0 or H_1 according as $\hat{\theta}_{N(g,c)} \leq \theta^*$ or $\hat{\theta}_{N(g,c)} \geq \theta^*$, where θ^* is obtained by solving $D(f_{\theta^*} || f_{\theta_0}) = D(f_{\theta^*} || f_{\theta_1})$.

For our case where $H_0 : \theta = 0$, unlike in (23) where $H_0 : \theta \leq 0$, $E[N|H_0]$ largely depends upon the value θ_1 . As θ_1 increases, $E[N|H_0]$ decreases and $E[N|H_1]$ increases. If $P_l \in [\underline{P}, \bar{P}]$ for all l then a good choice of θ_1 , is $(\bar{P} - \underline{P})/2$.

1) *GLR-SPRT*: First we modify DualSPRT. In the distributed setup with the received power at the local nodes unknown, the local nodes will use the Lai's algorithm mentioned above while the fusion node runs the SPRT. All other details remain same. We call this algorithm GLR-SPRT.

The performance of GLR-SPRT is compared with DualSPRT (where the received powers are assumed known at the local nodes) for the example in Section III-B4 in Table V. Interestingly $E[N|H_1]$ for GLR-SPRT is actually lower than for DualSPRT, but $E[N|H_0]$ is higher.

E_{DD}	$P_{FA} = 0.1$	$P_{FA} = 0.05$	$P_{FA} = 0.01$	E_{DD}	$P_{MD} = 0.1$	$P_{MD} = 0.05$	$P_{MD} = 0.01$
DualSPRT	1.921	3.074	5.184	DualSPRT	2.06	3.177	5.264
GLRSPRT	2.745	3.852	6.115	GLRSPRT	1.425	2.522	4.857

(a) Under H_0 (b) Under H_1

TABLE V: Comparison of E_{DD} between GLRSPRT and DualSPRT for different SNR's between the Primary and the Secondary Users.

2) *GLR-CSPRT*: This is a modified version of SPRT-CSPRT. Here, we modify GLR-SPRT to GLR-CSPRT with appropriate change in quantisation and using CSPRT at the fusion center instead of SPRT. The quantisation (17) is changed in the following way: if $\hat{\theta}_N \geq \theta^*$, let $\mathcal{I}_1 = [g(kc), g(kc3\Delta))$, $\mathcal{I}_2 = [g(kc3\Delta), g(kc2\Delta))$, $\mathcal{I}_3 = [g(kc2\Delta), g(kc\Delta))$ and $\mathcal{I}_4 = [g(kc\Delta), \infty)$. $Y_{k,l} = b_n^1$ if $W_{k,l} \in \mathcal{I}_n$ for some n . If $\hat{\theta}_N \leq \theta^*$ we will transmit from $\{b_1^0, b_2^0, b_3^0, b_4^0\}$ under the same conditions. Here, Δ is a tuning parameter and $0 \leq 3\Delta \leq 1$.

The performance comparison of GLR-SPRT and GLR-CSPRT for the example in Section V-B (with $Z_k \sim \mathcal{N}(0, 1)$) is given in Figure 3a and Figure 3b. Here $\Delta = 0.25$. As the performance under H_1 and H_0 are different, we give the values under both. We can see that GLR-SPRT is always inferior to GLR-CSPRT. For E_{DD} under H_1 , interestingly GLR-CSPRT has lesser values than that of SPRT-CSPRT for $P_{FA} > 0.02$ (note that SPRT-CSPRT has complete knowledge of the SNRs), while under H_0 it has higher values than SPRT-CSPRT.

B. Channel with Fading

In this section we consider the system where the channels from the primary transmitter to the secondary nodes have fading ($h_l \neq 1$). We assume slow fading, i.e., the channel coherence time is longer than the hypothesis testing time.

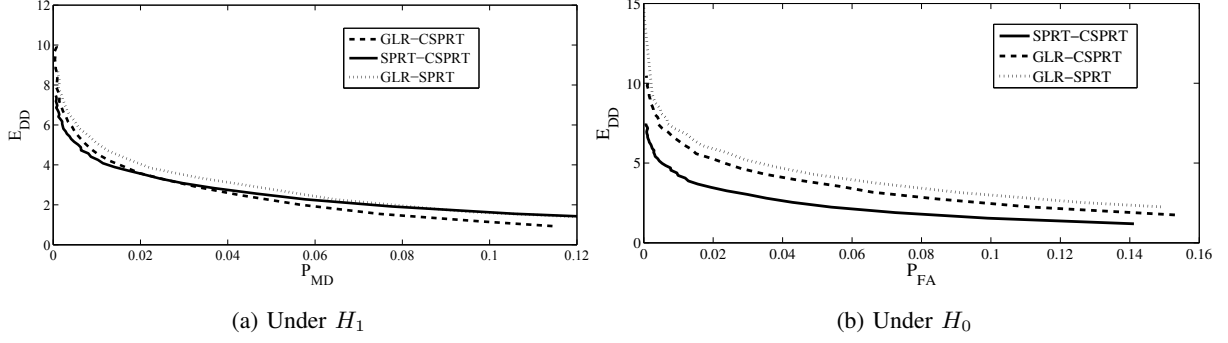


Fig. 3: Comparison among SPRT-CSPRT, GLR-SPRT and GLR-CSPRT for different SNR's between the Primary and the Secondary Users

When the fading gain h_l is known to the l^{th} secondary node then this case can be considered as the different SNR case as in the example given in Section III-B4. Thus we consider the case where the channel gain h_l is not known to the l^{th} node.

We consider the energy detector setup of Section VI-A. However, now P_l , the received signal power at the local node l is random. If the fading is Rayleigh distributed then P_l has exponential distribution. The hypothesis testing problem becomes

$$H_0 : f_{0,l} \sim \mathcal{N}(0, \sigma^2); H_1 : f_{1,l} \sim \mathcal{N}(\theta, \sigma^2) \quad (25)$$

where θ is random with exponential distribution and σ^2 is the variance of noise. We will assume that σ^2 is known at the nodes.

We are not aware of this problem being handled via sequential hypothesis testing before. However we use Lai's algorithm in Section VI-A where we take θ_1 to be the median of the distribution of θ , i.e., $P(\theta \geq \theta_1) = 1/2$. This seems a good choice for θ_1 as a compromise between $E[N|H_0]$ and $E[N|H_1]$.

1) *GLRSPRT*: First we apply the technique on GLRSPRT. We use an example where $\sigma^2 = 1, \theta = \exp(1)$, $\text{Var}(Z_k) = 1$, and $L = 5$. The performance of this algorithm is compared with that of DualSPRT (with perfect channel state information) in Table VIa (under H_0) and Table VIb (under H_1). We observe that under H_1 , for high P_{MD} this algorithm works better than DualSPRT with channel state information, but as P_{MD} decreases DualSPRT becomes better and the difference increases. For H_0 , GLRSPRT is always worse and the difference is almost constant.

2) *GLR-CSPRT*: We use the example given above. Table VII provides comparison of Dual-SPRT, GLR-SPRT and GLR-CSPRT. Notice that the comment given for E_{DD} for Figure 3a is

E_{DD}	$P_{FA} = 0.1$	$P_{FA} = 0.05$	$P_{FA} = 0.01$	E_{DD}	$P_{MD} = 0.1$	$P_{MD} = 0.08$	$P_{MD} = 0.06$
DualSPRT	1.669	2.497	4.753	DualSPRT	1.74	1.854	2.417
GLRSPRT	3.191	4.418	7.294	GLRSPRT	1.62	3.065	5.42

(a) Under H_0
(b) Under H_1

TABLE VI: Comparison between GLRSPRT and DualSPRT with slow-fading between Primary and Secondary Users

also valid here.

E_{DD}	$P_{FA}=0.1$	$P_{FA}=0.07$	$P_{FA}=0.04$	E_{DD}	$P_{MD}=0.1$	$P_{MD}=0.07$	$P_{MD}=0.04$
DualSPRT	1.669	1.891	2.673	DualSPRT	1.74	1.948	2.728
GLR-SPRT	3.191	3.849	4.823	GLR-SPRT	1.62	3.533	9.624
GLR-CSPRT	2.615	3.192	4.237	GLR-CSPRT	0.94	1.004	4.225

(a) Under H_0
(b) Under H_1

TABLE VII: Comparison among DualSPRT, GLR-SPRT and GLR-CSPRT with slow fading between the Primary and the Secondary Users

VII. CONCLUSIONS

This paper presents fast algorithms for cooperative spectrum sensing satisfying reliability constraints. We have presented and analysed DualSPRT, a decentralized sequential hypothesis test. Simulation results corroborate the theoretical study of DualSPRT. Asymptotic properties of DualSPRT are also explored and it is found to be asymptotically optimal with respect to the optimal centralized test. Improvement over DualSPRT using CUSUM statics for the fusion center test leads to another algorithm in which the selection of parameters is easy to choose apart from performance enhancement. We also provide theoretical analysis of the algorithm. Numerical experiments show that this algorithm performs as well as an asymptotic order-2 optimal algorithm without fusion center noise, proposed in literature. We further extend our algorithms to cover the case of unknown SNR and channel fading and obtain satisfactory performance compared to perfect channel state information case.

APPENDIX A

PROOF OF THEOREM 1

We will prove the theorem under H_0 . The proof under H_1 will follow in the same way.

Let $\nu(a)$ be the stopping time when a random walk starting at zero with drift $\Delta(\mathcal{A}^0)$ (-ve under our assumptions) crosses a . Then,

$$N \leq N_0 \leq \tau(c) + \nu(-|\log c| - F_{\tau(c)}).$$

Therefore,

$$\frac{E_0[N]}{|\log c|} \leq \frac{E_0[\tau(c)]}{|\log c|} + \frac{E_0[\nu(-|\log c| - F_{\tau(c)})]}{|\log c|}. \quad (26)$$

We consider the first term on the R.H.S. of (26). Under our assumptions and choice of local node thresholds as $\rho_l |\log c|$ and $-r_l |\log c|$, from [13, Theorem 2] and the definition of the stopping time in [13, p. 2084], it can be seen that

$$\lim_{c \rightarrow 0} \frac{E_0[\tau(c)]}{|\log c|} \leq \frac{1}{D_{tot}^0}. \quad (27)$$

Also from [8, Remark 4.4, p. 85] as $c \rightarrow 0$, $\tau_l(c) \rightarrow \infty$ a.s. and $\lim_{c \rightarrow 0} \frac{\tau_l(c)}{|\log c|} = -\frac{1}{\delta_{0,l}}$ a.s. Therefore

$$\frac{\tau(c)}{|\log c|} \rightarrow \max_l -\frac{1}{\delta_{0,l}} \triangleq \frac{1}{\widehat{\delta}_0} \text{ a.s.} \quad (28)$$

Furthermore, from [10, proof of Theorem 1 (i) $\Rightarrow$ (ii) p. 871], it can be seen that $\{\tau_l(c)/|\log c|\}$ is uniformly integrable. Thus,

$$\frac{E[\tau(c)]}{|\log c|} \rightarrow \frac{1}{\widehat{\delta}_0}$$

The second term in R.H.S. of (26),

$$\frac{E_0[\nu(-|\log c| - F_{\tau(c)})]}{|\log c|} \leq \frac{E_0[\nu(-|\log c|)]}{|\log c|} + \frac{E_0[\nu(-F_{\tau(c)})]}{|\log c|}. \quad (29)$$

We know, from ([8, Chapter III]),

$$\frac{E_0[\nu(-|\log c|)]}{|\log c|} \rightarrow -\frac{1}{\Delta(\mathcal{A}^0)}. \quad (30)$$

Next consider $E_0[\nu(-F_{\tau(c)})]$. We have,

$$\begin{aligned} \frac{E_0[\nu(-F_{\tau(c)})]}{|\log c|} &= \frac{1}{|\log c|} \int_0^{|\log c|} E_0[\nu(-x) | F_{\tau(c)} = x] dP_{F_{\tau(c)}}(x) \\ &\quad + \frac{1}{|\log c|} \int_{|\log c|}^{\infty} E[\nu(-x)] dP_{F_{\tau(c)}}(x) \end{aligned}$$

$$\leq \frac{E_0[\nu(-|\log c|)]}{|\log c|} + \int_{|\log c|}^{\infty} \frac{E_0[\nu(-x)]}{x} \frac{x}{|\log c|} dP_{F_{\tau(c)}}(x). \quad (31)$$

Since $E_0[\nu(-x)]/x \rightarrow -1/\Delta(\mathcal{A}^0)$ as $x \rightarrow \infty$, for any $\epsilon > 0$, $\exists M$ such that

$$\frac{E_0[\nu(-x)]}{x} \leq \epsilon - \frac{1}{\Delta(\mathcal{A}^0)} \text{ for } x > M.$$

Take c_1 such that $|\log c| > M$ for $c < c_1$. Then, for $c < c_1$,

$$\int_{|\log c|}^{\infty} \frac{E_0[\nu(-x)]}{x} \frac{x}{|\log c|} dP_{F_{\tau(c)}}(x) \leq \frac{\epsilon - \frac{1}{\Delta(\mathcal{A}^0)}}{|\log c|} \int_{|\log c|}^{\infty} x dP_{F_{\tau(c)}}(x) \leq \frac{\epsilon - \frac{1}{\Delta(\mathcal{A}^0)}}{|\log c|} E_0[F_{\tau(c)}]. \quad (32)$$

Since $\lim_{c \rightarrow 0} \tau(c)/|\log c| = 1/\widehat{\delta}_0$ a.s. and $\{\tau(c)/|\log c|\}$ is uniformly integrable, when $E_0 \left[\left(\log \frac{f_{1,l}(X_{1,l})}{f_{0,l}(X_{1,l})} \right)^2 \right] < \infty$, $1 \leq l \leq L$, we get, ([8, Remark 7.2, p. 39]),

$$\lim_{c \rightarrow 0} \frac{E_0[F_{\tau(c)}]}{|\log c|} \leq \frac{1}{\widehat{\delta}_0} \theta_0, \quad (33)$$

where θ_0 is upper-bounded by $\Delta(\mathcal{A}^1)$.

From (31), (32) and (33),

$$\lim_{c \rightarrow 0} \frac{E_0[\nu(-F_{\tau(c)})]}{|\log c|} \leq -\frac{1}{\Delta(\mathcal{A}^0)} + \left(\epsilon - \frac{1}{\Delta(\mathcal{A}^0)} \right) \frac{\theta_0}{\widehat{\delta}_0}.$$

This, with (26), (27) and (29), implies that (since ϵ can be taken arbitrarily small),

$$\lim_{c \rightarrow 0} \frac{E_0[N]}{|\log c|} \leq \frac{1}{D_{tot}^0} + M_0,$$

where $M_0 = -\frac{1}{\Delta(\mathcal{A}^0)} \left(2 + \frac{\theta_0}{\widehat{\delta}_0} \right)$. Due to Lemma 1, θ_0 approaches zero as $c \rightarrow$ zero,

Similarly we can prove $\lim_{c \rightarrow 0} \frac{E_1[N]}{|\log c|} \leq \frac{1}{D_{tot}^1} + M_1$, $M_1 > 0$ being a constant depended on $\Delta(\mathcal{A}^1)$, $1/\widehat{\delta}_1 \triangleq \max_l(1/\delta_{1,l})$, θ_1 and D_{tot}^1 . ■

APPENDIX B

PROOF OF LEMMA 5

By Holder's inequality,

$$\begin{aligned} E_0 \left[e^{\eta_1 F_{\tau(c)}} \right] &= E_0 \left[e^{\eta_1 \sum_{k=1}^{\tau(c)} \xi_k} \right] = E_0 \left[e^{\eta_1 \sum_{k=1}^{\tau(c)} (\xi_k - \mu_0(k)) + \eta_1 \sum_{k=1}^{\tau(c)} \mu_0(k)} \right] \\ &\leq \left(E_0 \left[e^{\eta_1 p \sum_{k=1}^{\tau(c)} (\xi_k - \mu_0(k))} \right] \right)^{1/p} \left(E_0 \left[e^{\eta_1 q \sum_{k=1}^{\tau(c)} \mu_0(k)} \right] \right)^{1/q}, \end{aligned} \quad (34)$$

where $1/p + 1/q = 1$. Let $p' = \eta_1 p$ and $\xi'_k = \xi_k - \mu(k)$. Thus, $\{\xi'_k\}$ is i.i.d. $\sim \mathcal{N}(0, \sigma_{FC}^2)$. Also, $E_0[e^{\eta_1 F_{\tau(c)}}] < \infty$ if $E_0[e^{p' \sum_{k=1}^{\tau(c)} \xi'_k}] < \infty$ and $E_0[e^{\eta_1 q \sum_{k=1}^{\tau(c)} \mu_0(k)}] < \infty$. Since $\sum_{k=1}^n \xi'_k$ is independent of $\tau(c)$,

$$\begin{aligned} E_0[e^{p' \sum_{k=1}^{\tau(c)} \xi'_k}] &= \sum_{n=1}^{\infty} E_0[e^{p' \sum_{k=1}^n \xi'_k} | \tau(c) = n] P[\tau(c) = n] \\ &= \sum_{n=1}^{\infty} E_0[e^{p' \sum_{k=1}^n \xi'_k}] P[\tau(c) = n] = \sum_{n=1}^{\infty} \left(E_0[e^{p' \xi'_1}]\right)^n P[\tau(c) = n] \\ &= E_0\left[\left(E_0[e^{p' \xi'_1}]\right)^{\tau(c)}\right] < \infty, \end{aligned} \quad (35)$$

if $E_0[e^{p' \xi'_1}] < \infty$ and $E_0[\phi(p)^{\tau(c)}] < \infty$, where $\phi(p) = E_0[e^{p' \xi'_1}]$. From [9, Theorem 1.3] $E_0[e^{\eta_2 \tau(c)}] < \infty$, for $0 < \eta_2 < R_0^l$ and $R_0^l = -\log \inf_{t \geq 0} E_0\left[e^{-t \log \frac{f_{1,l}(X_{1,l})}{f_{0,l}(X_{1,l})}}\right]$. Combining this fact with $\tau(c) < \sum_{l=1}^L \tau_l(c)$ (see (13)) yields $E_0[e^{\eta_2 \tau(c)}] < E_0[e^{\sum_{l=1}^L \eta_2 \tau_l(c)}] < \infty$, for $0 < \eta_2 < R_0 = \min_l R_0^l$. Therefore $E_0[\phi(p)^{\tau(c)}] < \infty$ if $0 < \log \phi(p) < R_0$.

Also, if $0 < \eta_1 q \theta_0 < R_0$,

$$E_0\left[e^{\eta_1 q \sum_{k=1}^{\tau(c)} \mu_0(k)}\right] \leq E_0[e^{\eta_1 q \tau(c) \theta_0}] < \infty. \quad (36)$$

Since the fusion center noise is $\mathcal{N}(0, \sigma_{FC}^2)$, $\log \phi(p) = 2 \frac{\mu^2}{\sigma_{FC}^2} \eta_1^2 p^2$ and $\eta_1 q \theta_0 = \eta_1 q \frac{2\mu}{\sigma_{FC}^2} Lb$. From (35) and (36),

$$\eta_1 < \min \left(\sqrt{\frac{R_0 \sigma_{FC}^2}{2\mu^2 p^2}}, \frac{R_0 \sigma_{FC}^2}{2\mu Lb q} \right) \triangleq R^*. \quad (37)$$

Taking $p = q = 2$, to make $R^* > 1$, we need,

$$\mu < \min \left(\sqrt{\frac{R_0 \sigma_{FC}^2}{8}}, \frac{R_0 \sigma_{FC}^2}{4Lb} \right). \quad (38)$$

APPENDIX C

PROOF OF THEOREM 2

We prove the result for P_{FA} . For P_{MD} it can be proved in the same way.

Probability of False Alarm can be written as,

$$P_{FA} = P_0(\text{Reject } H_0) = P_0[\text{FA after } \tau(c)] + P_0[\text{FA before } \tau(c)]. \quad (39)$$

The first term in R.H.S.,

$$P_0[\text{FA after } \tau(c)] = P_0[\text{FA after } \tau(c); \mathcal{A}^0(c)] + P_0[\text{FA after } \tau(c); (\mathcal{A}^0(c))^c]. \quad (40)$$

Since events $\{\text{FA after } \tau(c)\}$ and $(\mathcal{A}^0(c))^c$ are mutually exclusive, the second term in the above expression is zero. Now consider $P_0 [\text{FA after } \tau(c); \mathcal{A}^0(c)]$. For $0 < r < 1$,

$$\begin{aligned}
& P_0 [\text{FA after } \tau(c); \mathcal{A}^0(c)] \\
& \leq P_0 [\text{Random walk with drift } \Delta(\mathcal{A}^0(c)) \text{ and initial value } F_{\tau(c)} \text{ crosses } |\log c|] \\
& \leq P_0 [\text{Random walk with drift } \Delta(\mathcal{A}^0(c)) \text{ and } F_{\tau(c)} \leq r|\log c| \text{ crosses } |\log c|] \\
& \quad + P_0 [\text{Random walk with drift } \Delta(\mathcal{A}^0(c)) \text{ and } F_{\tau(c)} > r|\log c| \text{ crosses } |\log c|] \\
& \leq P_0 [\text{Random walk with drift } \Delta(\mathcal{A}^0(c)) \text{ and } F_{\tau(c)} \leq r|\log c| \text{ crosses } |\log c|] \\
& \quad + P_0 [F_{\tau(c)} > r|\log c|]. \tag{41}
\end{aligned}$$

Considering the first term in the above expression,

$$\begin{aligned}
& \frac{P_0 [\text{Random walk with drift } \Delta(\mathcal{A}^0(c)) \text{ and } F_{\tau(c)} \leq r|\log c| \text{ crosses } |\log c|]}{c|\log c|} \\
& \leq \frac{P_0 [\text{Random walk with drift } \Delta(\mathcal{A}^0(c)) \text{ and } F_{\tau(c)} = r|\log c| \text{ crosses } |\log c|]}{c|\log c|} \\
& \stackrel{(A)}{\leq} \frac{e^{-(1-r)s'|\log c|}}{c|\log c|} = \frac{c^{(1-r)s'}}{c|\log c|} \rightarrow 0, \tag{42}
\end{aligned}$$

iff $(1-r)s' \geq 1$. Here (A) follows from [15, p. 78-79]¹ where s' is positive and it is the solution of $E_0 \left[e^{s' \log \frac{g\mu_1(Y_k)}{g-\mu_0(Y_k)}} | \mathcal{A}^0(c) \right] = 1$.

We choose $s' > 1$ and $0 < r < 1$ to satisfy $(1-r)s' \geq 1$. For $s' > 1$, we need $Lb/\mu > 1$ under H_0 and H_1 which follows from our assumptions.

Consider the second term in (41). From Lemma 5,

$$P_0 [F_{\tau(c)} > r|\log c|] \leq \frac{E_0[e^{\eta_1 F_{\tau(c)}}]}{e^{\eta_1 r|\log c|}} < \infty. \tag{43}$$

$$\text{If } \eta_1 r \geq 1, \quad \frac{E_0[e^{\eta_1 F_{\tau(c)}}]}{c^{1-\eta_1 r}|\log c|} \rightarrow 0. \tag{44}$$

From Lemma 5, $E_0[e^{\eta_1 F_{\tau(c)}}] < \infty$ is assured by choosing μ as in (38). Then we can choose $\eta_1 > 1$, $\frac{1}{\eta_1} \leq r \leq 1 - \frac{1}{s'}$.

¹For a random walk $W_n = \sum_{i=1}^n X_i$, with stopping times $T_a = \inf\{n \geq 1 : W_n \leq a\}$, $T_b = \inf\{n \geq 1 : W_n \geq b\}$ and $T_{a,b} = \min(T_a, T_b)$, $a < 0 < b$, let s' be the non-zero solution to $M(s') = 1$, where M denotes the M.G.F. of X_i . Then, $s' < 0$ if $E[X_i] > 0$, and $s' > 0$ if $E[X_i] < 0$ and $E[\exp(s'W_{T_{a,b}})] = 1$ ([15, p. 78-79]). Then it can be shown that $P(W_{T_a}) \leq \exp(-s'a)$ when $E[X_i] > 0$ and $P(W_{T_b}) \leq \exp(-s'b)$ when $E[X_i] < 0$.

Now we consider the second term in (39). Let F_k^* be the Gaussian random walk with mean drift θ_0 , the worst case mean of the drift of F_k . Under H_0 , $\theta_0 > 0$ and under H_1 , $\theta_0 < 0$. In contrast to F_k , F_k^* is a random walk. Then,

$$\begin{aligned}
P_0[\text{FA before } \tau(c)] &\leq \sum_{n=1}^{\infty} P_0 \left[\sup_{1 \leq k \leq n} F_k^* \geq |\log c| \mid \tau(c) = n \right] P[\tau(c) = n] \\
&= \sum_{n=1}^{\infty} P_0 \left[\sup_{1 \leq k \leq n} F_k^* \geq |\log c| \right] P[\tau(c) = n] \\
&\leq \sum_{n=1}^{\infty} P_0 \left[\sup_{1 \leq k \leq n} (F_k^* - k\theta_0) \geq |\log c| - n\theta_0 \right] P[\tau(c) = n] \\
&\stackrel{(A)}{\leq} \sum_{n=1}^{\infty} 2P_0[F_n^* - n\theta_0 \geq |\log c| - n\theta_0] P[\tau(c) = n] \\
&\stackrel{(B)}{\leq} \sum_{n=1}^{\infty} \exp \left(-\frac{(|\log c| - n\theta_0)^2}{2n\sigma^2} \right) P[\tau(c) = n], \tag{45}
\end{aligned}$$

where (A) is due to the inequality (10) and (B) follows from the Chernoff bound of Q-function.

Therefore,

$$\begin{aligned}
\frac{P_0[\text{FA before } \tau(c)]}{c|\log c|} &\leq \frac{1}{c|\log c|} \sum_{n=1}^M \exp \left(\frac{-|\log c|^2}{2M\sigma^2} \right) \exp \left(\frac{-\theta_0^2}{2\sigma^2} \right) \exp \left(\frac{\theta_0|\log c|}{\sigma^2} \right) \\
&\quad + \frac{1}{c|\log c|} \sum_{n=M+1}^{\infty} \exp \left(\frac{-n\theta_0^2}{2\sigma^2} \right) \exp \left(\frac{\theta_0|\log c|}{\sigma^2} \right) P[\tau(c) \geq M+1]. \tag{46}
\end{aligned}$$

Take $M = \lceil |\log c|/2(\alpha + \mu) \rceil$, for some $\alpha > 0$, $[a]$ denoting integer part of a . Then the first term on the R.H.S. of (46)

$$\begin{aligned}
&\leq \frac{1}{c|\log c|} M \exp \left(\frac{-|\log c|^2}{2M\sigma^2} + \frac{\theta_0|\log c|}{\sigma^2} \right) \\
&= \frac{1}{c|\log c|} M \exp \left(\frac{-|\log c|}{\sigma^2} \left(\frac{|\log c|}{2M} - \theta_0 \right) \right) = \frac{Mc^{\alpha/\sigma^2}}{c|\log c|} \rightarrow 0, \tag{47}
\end{aligned}$$

if we take α such that $\alpha/\sigma^2 \geq 1$. In the following we take $\alpha = \sigma^2$.

The second term in (46),

$$\begin{aligned}
&= \frac{1}{c|\log c|} \sum_{n=M+1}^{\infty} \exp \left(\frac{-n\theta_0^2}{2\sigma^2} \right) \exp \left(\frac{\theta_0|\log c|}{\sigma^2} \right) P[\tau(c) \geq M+1] \\
&\leq \frac{1}{c|\log c|} \exp \left(\frac{\theta_0|\log c|}{\sigma^2} \right) \frac{E_0[e^{\eta\tau(c)}]}{e^{\eta(M+1)}} \sum_{n=M+1}^{\infty} \exp \left(\frac{-n\theta_0^2}{2\sigma^2} \right)
\end{aligned}$$

$$= \frac{1}{c|\log c|} \exp\left(\frac{\theta_0|\log c|}{\sigma^2}\right) \frac{E_0[e^{\eta\tau(c)}]}{e^{\eta(M+1)}} \frac{e^{\frac{-(M+1)\theta_0^2}{\sigma^2}}}{1 - e^{\frac{-\theta_0^2}{2\sigma^2}}} \quad (48)$$

$$\leq K \frac{c^{\frac{-\theta_0}{\sigma^2}}}{c|\log c|} E_0[e^{\eta\tau(c)}] e^{-|\log c|\eta'}, \quad (49)$$

where $\eta' = \eta + \theta_0^2/2\sigma^2 2(\alpha + \theta_0)$ and $K = e^{-\eta-M\frac{\theta_0^2}{\sigma^2}}/1 - e^{\frac{-\theta_0^2}{2\sigma^2}}$.

Recall that $E_0[e^{\eta\tau(c)}] < \infty$ if $0 < \eta < R_0$ (see proof of Lemma 5). It can be seen that η and η_1 are independent constants. Moreover it is known from [9, Theorem 1.5] that, as $|\log c| \rightarrow \infty$, $E_0[e^{\eta\tau_l(c)}] \leq \varphi_0^l e^{\varphi_0^l |\log c|}$, where φ_0^l is the minimal value such that $E_0\left[e^{-\varphi_0^l \log \frac{f_{1,l}(X_{1,l})}{f_{0,l}(X_{1,l})}}\right] = e^\eta$, and φ_0^l is a function of φ_0^l . Therefore, due to (13), $E[e^{\eta\tau(c)}] \leq \varphi_0' e^{\varphi_0 |\log c|L}$, as $c \rightarrow 0$, where $\varphi_0 = \sum_{l=1}^L \varphi_0^l$ and φ_0' is a function of φ_0 . Then (49) is upper-bounded by

$$K \frac{c^{\frac{-\theta_0}{\sigma^2}}}{c|\log c|} \varphi_0' c^{-\varphi_0} c^{\eta'} \rightarrow 0, \quad (50)$$

if $\eta' \geq 1 + \varphi_0 + \frac{\theta_0}{\sigma^2}$.

Combining (42), (44) and (50), we get $\frac{P_{FA}}{c|\log c|} \rightarrow 0$ as $c \rightarrow 0$.

Following similar steps with obvious modifications we can also get $\frac{P_{MD}}{c|\log c|} \rightarrow 0$ as $c \rightarrow 0$. ■

REFERENCES

- [1] I. Akyildiz, B. Lo, and R. Balakrishnan, "Cooperative spectrum sensing in cognitive radio networks: A survey," *Physical Communication*, vol. 4, no. 1, pp. 40–62, 2011.
- [2] T. Banerjee, V. Sharma, V. Kavitha, and A. K. JayaPrakasam, "Generalized analysis of a distributed energy efficient algorithm for change detection," *IEEE Trans. Wireless Commun.*, vol. 10, no. 1, pp. 91–101, Jan 2011.
- [3] H. M. Barakat and Y. H. Abdelkader, "Computing the moments of order statistics from nonidentical random variables," *Statistical Methods & Applications*, vol. 13, no. 1, pp. 15–26, 2004.
- [4] P. Billingsley, *Probability and Measure*, 2nd ed. John Wiley & Sons, 1986.
- [5] J. F. Chamberland and V. V. Veeravalli, "Decentralized detection in sensor networks," *IEEE Trans. Signal Process.*, vol. 51, no. 2, pp. 407–416, Feb 2003.
- [6] K. W. Choi, W. S. Jeon, and D. G. Jeong, "Sequential detection of cyclostationary signal for cognitive radio systems," *IEEE Trans. Wireless Commun.*, vol. 8, no. 9, pp. 4480–4485, Sep 2009.
- [7] G. Fellouris and G. V. Moustakides, "Decentralized sequential hypothesis testing using asynchronous communication," *IEEE Trans. Inf. Theory*, vol. 57, no. 1, pp. 534–548, 2011.
- [8] A. Gut, *Stopped Random Walks: Limit Theorems and Applications*. Springer-Verlag Berlin and Heidelberg GmbH & Co. K, 1988.
- [9] A. Iksanov and M. Meiners, "Exponential moments of first passage times and related quantities for random walks," *Electronic Communications in Probability*, vol. 15, pp. 365–375, 2010.

- [10] S. Janson, "Moments for first-passage and last-exit times, the minimum, and related quantities for random walks with positive drift," *Advances in applied probability*, pp. 865–879, 1986.
- [11] L. Lai, Y. Fan, and H. V. Poor, "Quickest detection in cognitive radio: A sequential change detection framework," in *Proc. IEEE Global Telecommunications Conference (GLOBECOM)*, Dec 2008.
- [12] T. L. Lai, "Nearly optimal sequential tests of composite hypotheses," *The Annals of Statistics*, pp. 856–886, 1988.
- [13] Y. Mei, "Asymptotic optimality theory for decentralized sequential hypothesis testing in sensor networks," *IEEE Trans. Inf. Theory*, vol. 54, no. 5, pp. 2072–2089, May 2008.
- [14] E. Page, "Continuous inspection schemes," *Biometrika*, vol. 41, no. 1/2, pp. 100–115, 1954.
- [15] H. V. Poor and O. Hadjiladis, *Quickest Detection*, 1st ed. Cambridge University Press, 2008.
- [16] Z. Quan, S. Cui, H. Poor, and A. Sayed, "Collaborative wideband sensing for cognitive radios," *IEEE Signal Process. Mag.*, vol. 25, no. 6, pp. 60–73, Nov 2008.
- [17] H. Rootzén, "Maxima and exceedances of stationary markov chains," *Advances in applied probability*, pp. 371–390, 1988.
- [18] S. M. Ross, *Stochastic Processes*, 2nd ed. Wiley, 1995.
- [19] T. L. Saaty, *Nonlinear Integral Equations*. Dover Publications, 1981.
- [20] Y. Shei and Y. T. Su, "A sequential test based cooperative spectrum sensing scheme for cognitive radios," in *Proc. IEEE 19th International Symposium on Personal, Indoor and Mobile Radio Communications (PIMRC)*, Sep 2008.
- [21] D. Siegmund, *Sequential analysis: tests and confidence intervals*. Springer, 1985.
- [22] J. Unnikrishnan and V. V. Veeravalli, "Cooperative sensing for primary detection in cognitive radio," *IEEE J. Sel. Topics Signal Process.*, vol. 2, no. 1, pp. 18–27, Feb 2008.
- [23] V. V. Veeravalli, T. Basar, and H. V. Poor, "Decentralized sequential detection with a fusion center performing the sequential test," *IEEE Trans. Inf. Theory*, vol. 39, no. 2, pp. 433–442, Mar 1993.
- [24] Y. Yilmaz, G. V. Moustakides, and X. Wang, "Sequential decentralized detection under noisy channels," in *Proc. 50th Annual Allerton Conference on Communication, Control, and Computing (Allerton)*, Oct 2012.
- [25] T. Yucek and H. Arslan, "A survey of spectrum sensing algorithms for cognitive radio applications," *IEEE Commun. Surveys Tuts.*, vol. 11, no. 1, pp. 116–130, Quarter 2009.